

LABCO Ltd




83 Laroche #103, Repentigny, Qc, J6A 7M3 Tel: (450) 581-7589 Fax: (450) 581-8463

**Garantie à vie
Lifetime Warranty**



CRK24-5

**Relais de contrôle
24VDC 5 amps
Control relay**

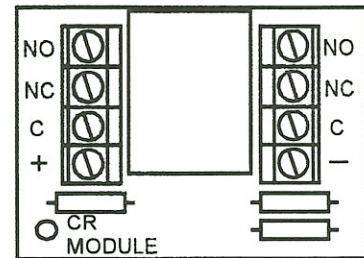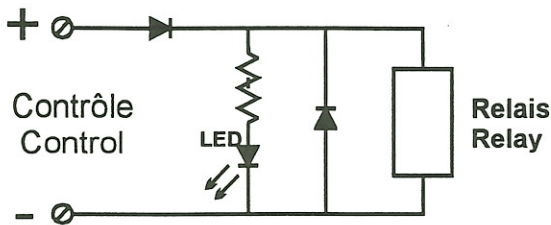

Spécifications

- 2 voltages disponibles:
 - CRK12-5: 12VCC, bobine de 280 ohms
 - CRK24-5: 24VCC, bobine de 1130 ohms
- Montage sur circuit imprimé
- Indicateur d'état de type DEL
- Diode de protection contre les renversements de polarités et le courant inverse du relais
- Contact DPDT
- Courant maximal: 5A CC/CA
- Voltage maximal: 250VCA 125VCC
- Puissance maximale: 120 watts ou 600VA
- Installation facilitée par l'utilisation de ruban adhésif inclus
- Dimensions:
 - Hauteur: 0.875" (22mm)
 - Largeur: 1.800" (45mm)
 - Longueur: 1.300" (33mm)

Specifications

- 2 available voltages:
 - CRK12-5: 12VDC, 280 ohm coil
 - CRK24-5: 24VDC, 1130 ohm coil
- PCB type
- LED status indicator
- Polarity diode
- Surge diode
- DPDT contact
- Max. switching current: 5A AC/DC
- Max. switching voltage: 250VAC 125VDC
- Maximum power: 120 watts or 600VA
- Adhesive foam mounting tape
- Dimensions:
 - Height: 0.875" (22mm)
 - Width: 1.800" (45mm)
 - Length: 1.300" (33mm)